

PHILIPS

Certaflux

LED System

CertaFlux SLM C
1204 L12 G1



Datasheet

Experience good performance with affordable cost

CertaFlux SLM C 1204 L12 G1

Certaflux LED SLM is a new CoB family from Philips. This range provides a more affordable CoB solution to customers with wide portfolio, flux range from 600lm - 4000lm, available in 2700K, 3000K, 3500K, 4000K, 5000K with CRI 80 and CRI90, and fully compatible with our Philips Drivers.

Key features and benefits

Cost effective SLM CoB

Complete portfolio

Flexibility to select a different lumen output between 600lm to 4000lm

System approach (CoB+Driver)

Flexibility to design Luminaire performance (high efficacy or high output)

50,000 hours lifetime @ Tc 85

September 2016

Ordering data

Commercial product name	EOC	12NC	Minimum order quantity
CertaFlux SLM C 830 1204 L12 G1	8718696 693735 00	9290 014 41180	100
CertaFlux SLM C 835 1204 L12 G1	8718696 693759 00	9290 014 41280	100
CertaFlux SLM C 840 1204 L12 G1	8718696 693773 00	9290 014 41380	100
CertaFlux SLM C 850 1204 L12 G1	8718696 693797 00	9290 014 41480	100
CertaFlux SLM C 930 1204 L12 G1	8718696 693810 00	9290 014 41580	100
CertaFlux SLM C 935 1204 L12 G1	8718696 693834 00	9290 014 41680	100
CertaFlux SLM C 940 1204 L12 G1	8718696 693858 00	9290 014 41780	100

Not all products are globally available by default.

Please contact your local Philips Lighting representative for local availability.

Drive currents

Parameter	Nominal*	Life**	Max***	Unit
CertaFlux SLM C 1204 L12 G1	450	755	755	mA

Module temperatures

Parameter	Nominal*	Life**	Max***	Unit
T _c (case temperature at T _c point)	85	85	95	°C

* Nominal value at which typical performance is specified

** Value at which life time is specified


*** Maximum value for safe operation, do not operate above this value

Optical characteristics - table per color (CCT)

CertaFlux SLM C 830 1204 L12 G1

Parameter	Min	Typ	Max	Unit
Luminous flux	1814	2016	2217	lm
Module efficacy		129		lm/W
Correlated color temperature (CCT)		3000		K
Color coordinates (CIEx, CIEy)		(0.4338, 0.4030)		-
Color consistency			3	SDCM
CRI	80	82		
Photobiological safety			RG1	
Energy efficiency label		A++		

Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI +/- 1.5

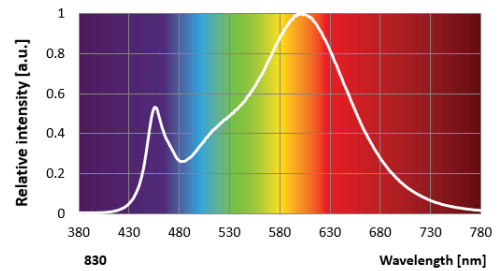


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81	93	93	79	82	92	81	57	6	84	78	73	84	97	

CertaFlux SLM C 835 1204 L12 G1

Parameter	Min	Typ	Max	Unit
Luminous flux	1850	2055	2261	lm
Module efficacy		132		lm/W
Correlated color temperature (CCT)		3500		K
Color coordinates (CIEx, CIEy)		(0.4073, 0.3818)		-
Color consistency			3	SDCM
CRI	80	82		
Photobiological safety			RG1	
Energy efficiency label		A++		

Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI +/- 1.5

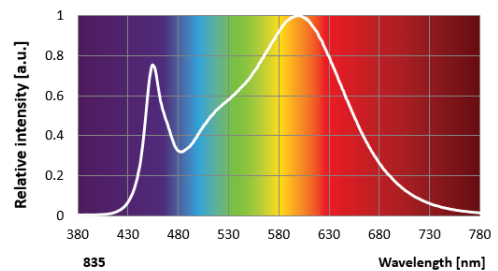


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
83	93	95	80	83	91	83	62	11	84	79	69	86	98	

CertaFlux SLM C 840 1204 L12 G1

Parameter	Min	Typ	Max	Unit
Luminous flux	1887	2096	2306	lm
Module efficacy		135		lm/W
Correlated color temperature (CCT)		4000		K
Color coordinates (CIEx, CIEy)		(0.3818, 0.3797)		-
Color consistency			3	SDCM
CRI	80	82		
Photobiological safety			RG1	
Energy efficiency label		A++		

Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI +/- 1.5

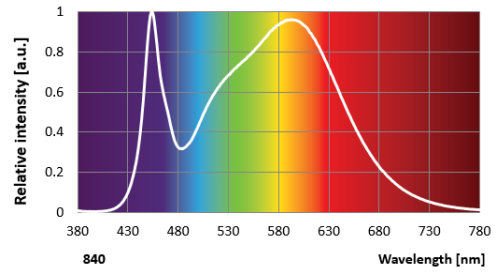


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80	89	96	79	80	85	86	63	5	74	77	58	82	98	

CertaFlux SLM C 850 1204 L12 G1

Parameter	Min	Typ	Max	Unit
Luminous flux	1887	2096	2306	lm
Module efficacy		135		lm/W
Correlated color temperature (CCT)		5000		K
Color coordinates (CIEx, CIEy)		(0.3447, 0.3553)		-
Color consistency			3	SDCM
CRI	80	82		
Photobiological safety			RG1	
Energy efficiency label		A++		

Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI +/- 1.5

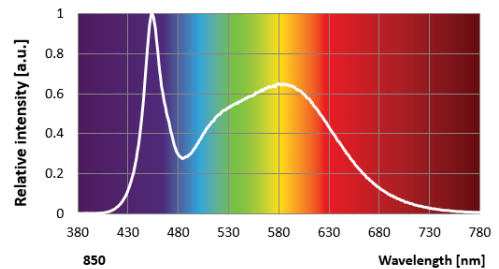


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80	90	94	79	80	84	86	65	4	74	77	55	83	97	

CertaFlux SLM C 930 1204 L12 G1

Parameter	Min	Typ	Max	Unit
Luminous flux	1504	1672	1839	lm
Module efficacy		107		lm/W
Correlated color temperature (CCT)		3000		K
Color coordinates (CIEx, CIEy)		(0.4338, 0.4030)		-
Color consistency			3	SDCM
CRI	90	92		
Photobiological safety			RG1	
Energy efficiency label		A+		

Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI +/- 1.5

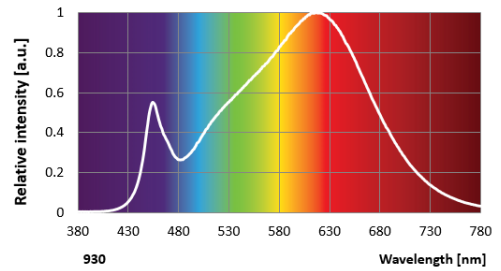


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
91	96	98	90	90	94	90	79	53	89	90	77	92	99	

CertaFlux SLM C 935 1204 L12 G1

Parameter	Min	Typ	Max	Unit
Luminous flux	1579	1754	1930	lm
Module efficacy		113		lm/W
Correlated color temperature (CCT)		3500		K
Color coordinates (CIEx, CIEy)		(0.4073, 0.3818)		-
Color consistency			3	SDCM
CRI	90	92		
Photobiological safety			RG1	
Energy efficiency label		A+		


Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI +/- 1.5

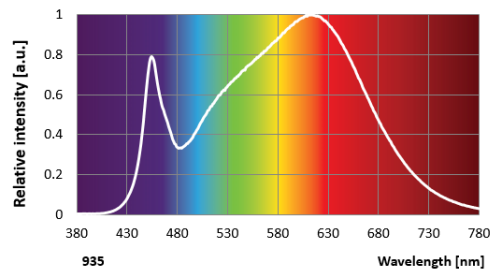

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
91	96	98	90	91	94	91	80	55	89	89	74	93	99	

Parameter	Min	Typ	Max	Unit
Luminous flux	1615	1795	1974	lm
Module efficacy		115		lm/W
Correlated color temperature (CCT)		4000		K
Color coordinates (CIEx, CIEy)		(0.3818, 0.3797)		-
Color consistency			3	SDCM
CRI	90	92		
Photobiological safety			RG1	
Energy efficiency label		A+		


Measurement precision for flux +/- 5%. Measurement precision for efficacy +/- 6%. Measurement precision for x, y +/- 0.005. Measurement precision for CRI +/- 1.5

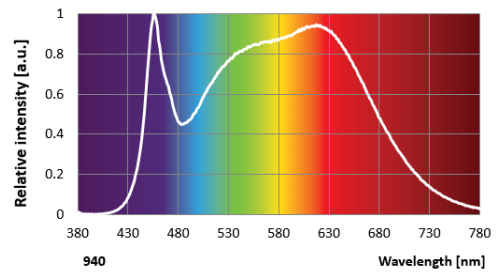

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93	96	98	90	91	94	94	86	68	90	90	69	94	98	

Beam shape

Bare CoB

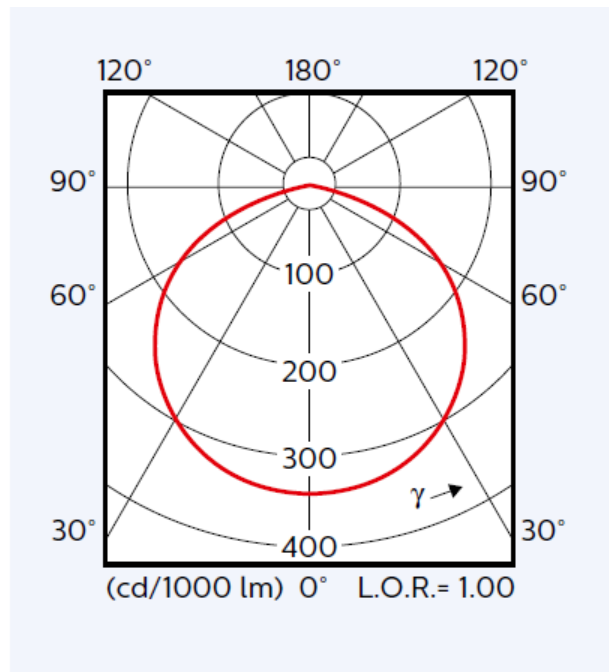

[CertaFlux SLM C 830 1204 L12 G1](#)[CertaFlux SLM C 940 1204 L12 G1](#)

Parameter	Min	Typ	Max	Unit
Forward voltage		34.6	37.6	V
Power consumption		15.6	16.9	W
Thermal power		9.4		W

Measurement precision for Vf +/- 3%. Measurement precision for power +/- 3.3%

[CertaFlux SLM C 835 1204 L12 G1](#)

Parameter	Min	Typ	Max	Unit
Forward voltage		34.6	37.6	V
Power consumption		15.6	16.9	W
Thermal power		9.3		W

Measurement precision for Vf +/- 3%. Measurement precision for power +/- 3.3%

[CertaFlux SLM C 840 1204 L12 G1](#)[CertaFlux SLM C 850 1204 L12 G1](#)

Parameter	Min	Typ	Max	Unit
Forward voltage		34.6	37.6	V
Power consumption		15.6	16.9	W
Thermal power		9.1		W

Measurement precision for Vf +/- 3%. Measurement precision for power +/- 3.3%

[CertaFlux SLM C 930 1204 L12 G1](#)

Parameter	Min	Typ	Max	Unit
Forward voltage		34.6	37.6	V
Power consumption		15.6	16.9	W
Thermal power		9.9		W

Measurement precision for Vf +/- 3%. Measurement precision for power +/- 3.3%


[CertaFlux SLM C 935 1204 L12 G1](#)

Parameter	Min	Typ	Max	Unit
Forward voltage		34.6	37.6	V
Power consumption		15.6	16.9	W
Thermal power		9.6		W

Measurement precision for Vf +/- 3%. Measurement precision for power +/- 3.3%


Flux and efficacy versus temperature at Tc (at I nominal)

Tcase [°C]	Flux [%]	Efficacy [%]
55	107	106
65	105	104
75	102	102
85	100	100
95	97	98

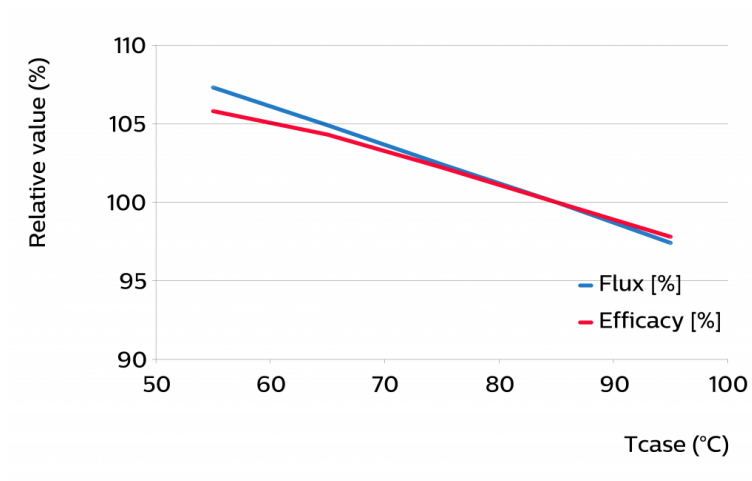

Lumen maintenance graphs


Lumen maintenance at I-life and Tc-life conditions

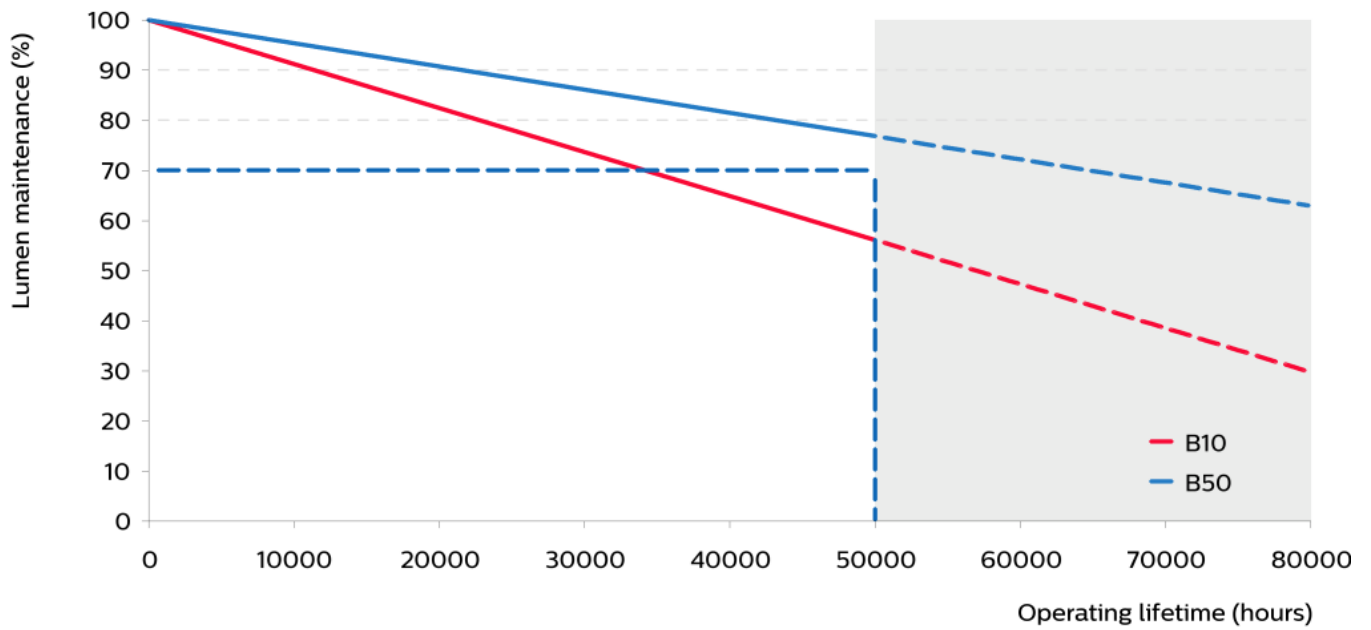

Mechanical characteristics

CertaFlux SLM C 830 1204 L12 G1
 CertaFlux SLM C 835 1204 L12 G1
 CertaFlux SLM C 840 1204 L12 G1
 CertaFlux SLM C 850 1204 L12 G1
 CertaFlux SLM C 930 1204 L12 G1
 CertaFlux SLM C 935 1204 L12 G1
 CertaFlux SLM C 940 1204 L12 G1

Parameter	Min	Typ	Max	Unit
Length	17.75	17.85	17.95	mm
Width	17.75	17.85	17.95	mm
Height PCB	1.05	1.15	1.25	mm
Height including dam	1.5	1.7	1.9	mm

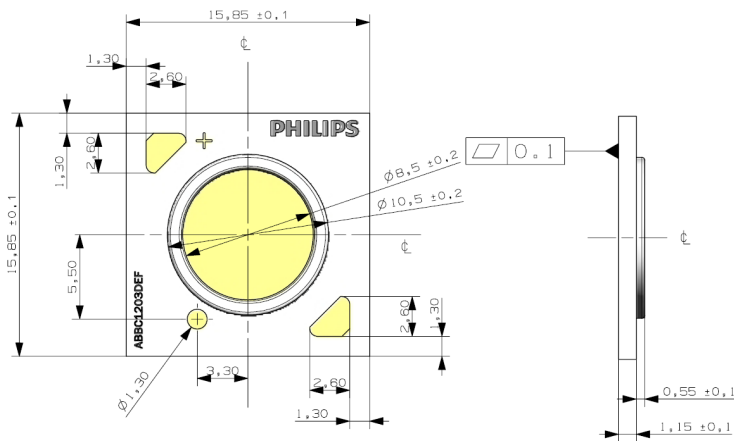

Absolute ratings

Parameter	Min	Typ	Max	Unit
Current through the LED module (I-max)			755	mA
Case temperature (Tc-max)			95	°C
Power at rated Vf-max and I-max			30.2	W
ESD Human Body Model (HBM) Class 3A JESD22-A114-E 8 kV			8	kV
ESD Machine Model (MM) Class B JESD22-A115-B			400	V
Ambient temperature	-20		35	°C
Storage temperature	-40		65	°C

Application information

Environmental

RoHS/REACH

Certificates and standards

IEC/TR 62278:2014


IEC 62031:2008 (First Edition) + A1:2012 + A2:2014

EN 62031:2008 (First Edition) + A1:2013 + A2:2015

Application

IP rating	No IP-rating
Overheating protection	No
Luminaire class	IEC Class I and Class II
Dimming	Yes

Warranty Window

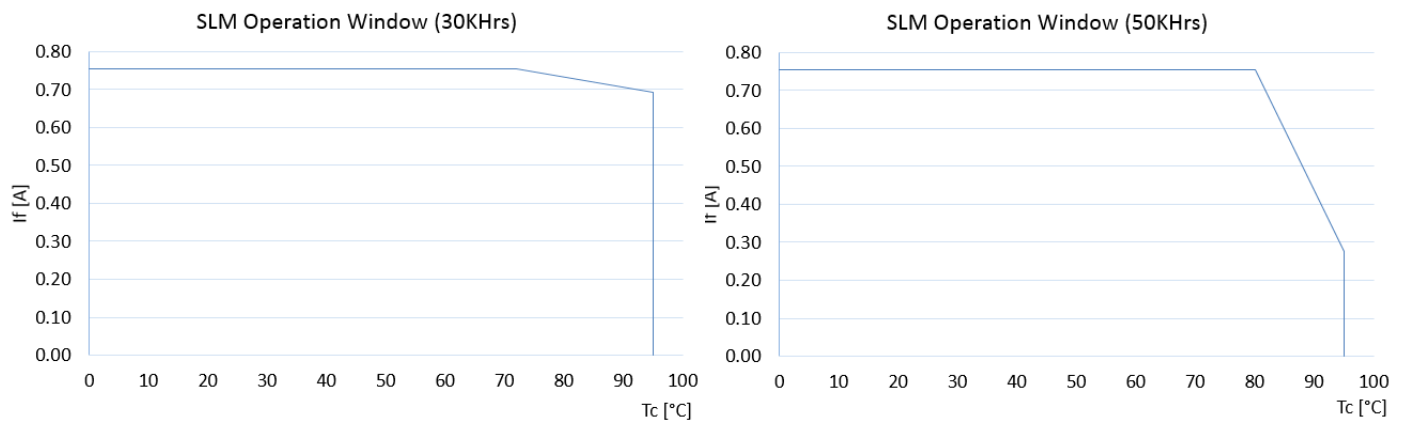

Notes

The slanted edge of the warranty window graph is defined for 3 switches per day or less.

In case more switching cycles are required, please contact the Philips design-in team for more detailed information and support.

